
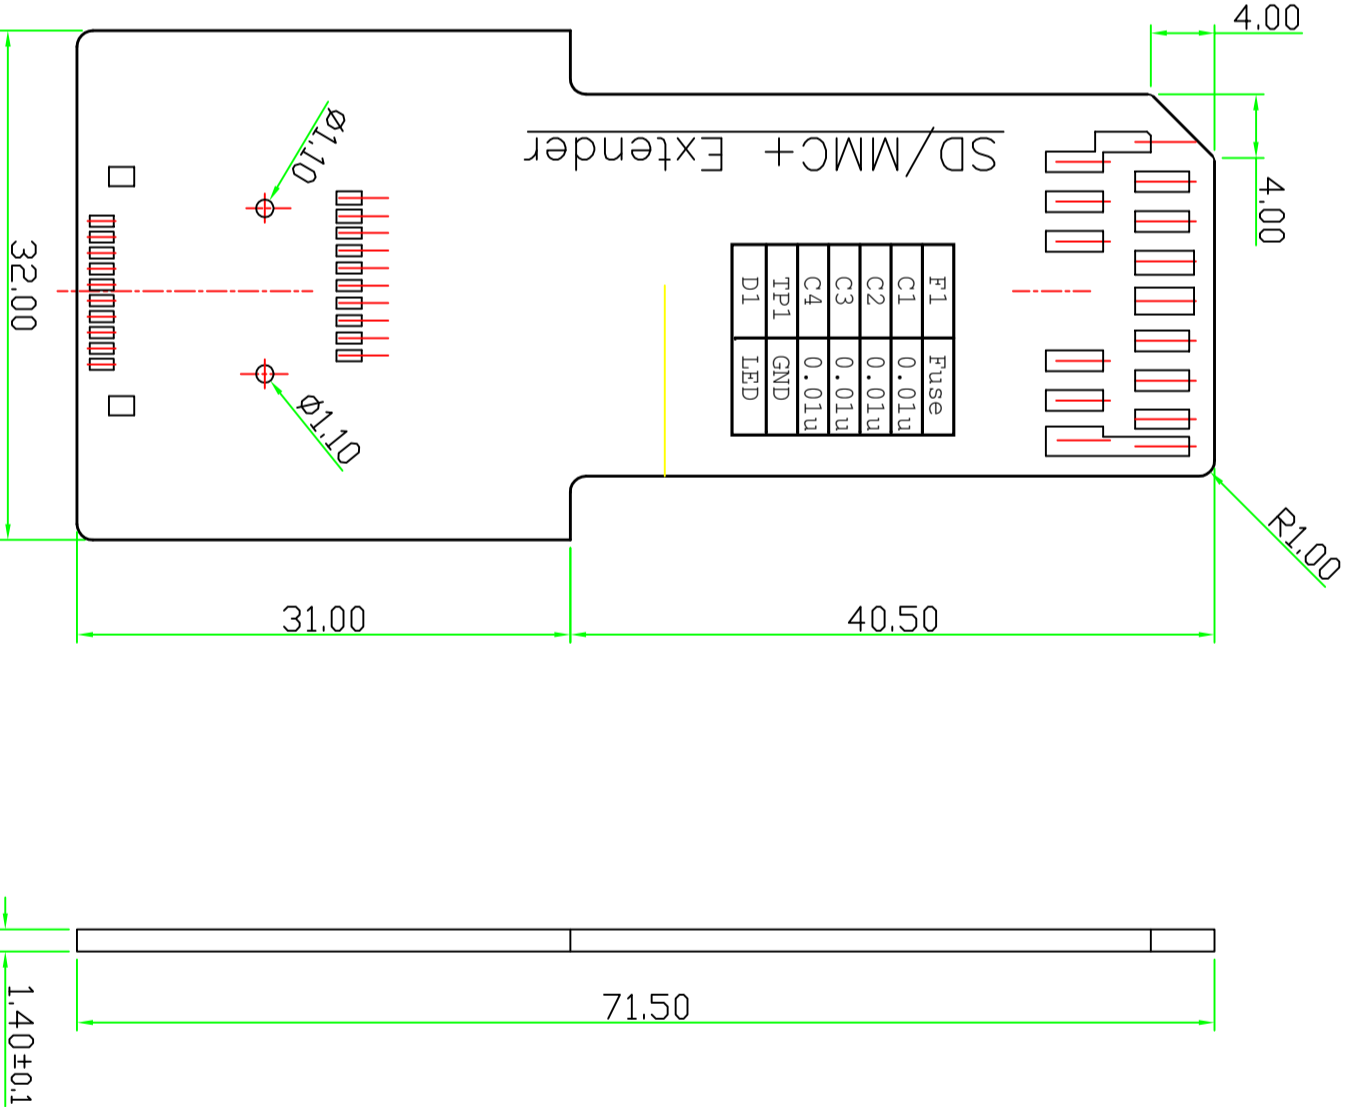


TYPE	OPEN	SHORT	
TP2 LED	Disable	Enable	
R1	DATA2	R11	DATA2-
R2	DATA3	R12	DATA3-
R3	DATA4	R13	CMD-
R4	CMD	R15	CLK-
R5	DATA5	R17	DAT0-
R6	CLK	R18	DAT1-
R7	DATA6	R8	DATA7
R9	DATA7	R10	DAT0
R10	DAT1	R20	330

F1	Fuse
C1	0.01u
C2	0.01u
C3	0.01u
C4	0.01u
TP1	GND
D1	LED

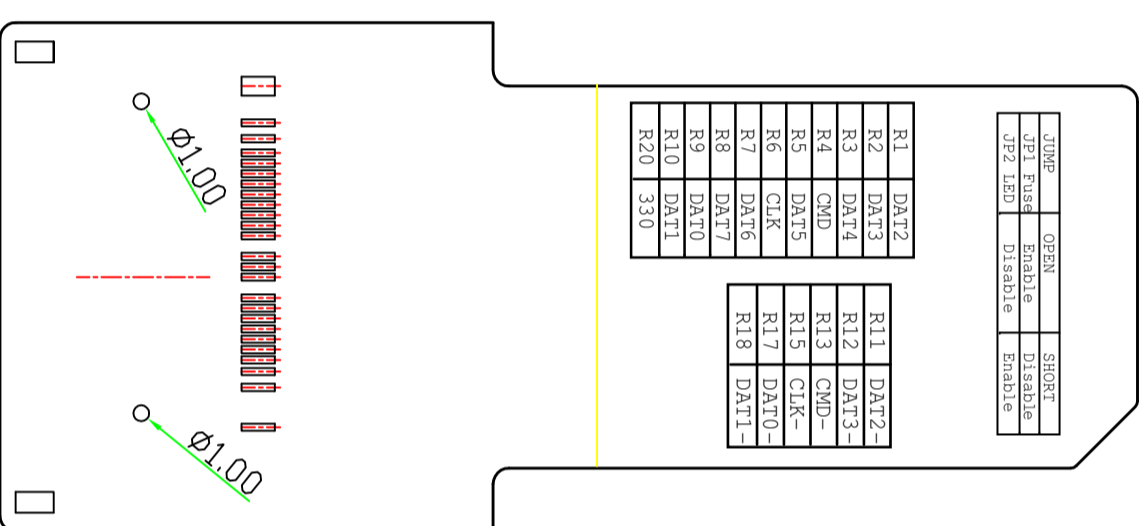

ALL DIMENSIONS IN MM
2 LAYER PCB 1.4MM TOLERANCE
±0.1MM

*Primary
(Component)
Side*

*Secondary
(Solder)
Side*

APPROVED:	- TOLERANCES -		UNIT:	TITLE :	SHEET
ENGINEER:	General	Angles	mm	SD/MMC Extender Card	1/1
CHECKED:	30~ ±0.25	0° ±3°	SCALE:	DRAWING NUMBER:	SIZE
	10~30 ±0.20	0.0° ±2°	1:1	A-G-MMCExt-PCBL	A4
DRAWN:	5~10 ±0.15			Date	REV.
Gerry Chen	0~5 ±0.10			2009/Jan/19	A/0



Blplus Technology