


PE4C V3.0

PCIe x16 Adapter

Product > eGPU > PE4C V3.0

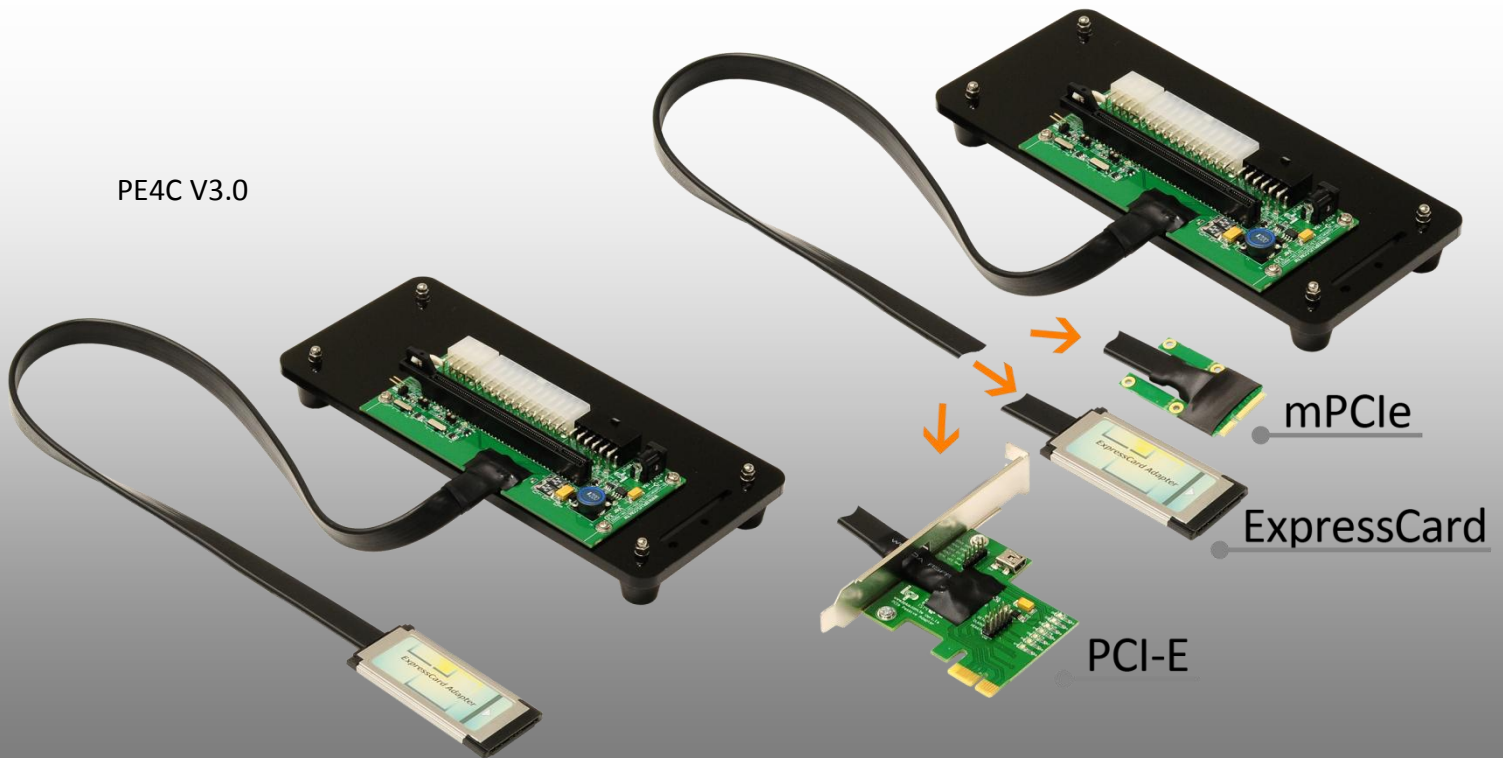

First Impression

The PE4C V3.0 is designed for Notebook PCs that converts PCI Express 16X Add-on Card to ExCard or mPCIe or PCIe x1 connector with up to Gen3 (8Gbps) speed.

This adapter allows you to use your existing PCI-E 16X Card in the notebook PC for gaming.

Function

- ◆ VGA card connection to computer or notebook PC
- ◆ Support two delay switch to avoid registration problems when boot. (SW1, SW2)
- ◆ Special foot cone, avoid graphics card fan noise.
- ◆ Support [ATX power](#) boot together function.
- ◆ DC Jack: External 12V Power Input.
- ◆ Support Suspend Clock (ExCard & mPCIe)
- ◆ Support two sets external pin to setup delay time. (J2, J3)
- ◆ Option Products :
 - PE4C-EC060A V3.0 –PCI-E to Express card adapter
 - PE4C-PM060A V3.0 –PCI-E to mPCI-e adapter
 - PE4C-HP060A V3.0 –PCI-E to PCI-E adapter

Specification

- ◆ **PE4C-PM060A V3.0** allows user to test PCI Express x16 Add-in-Card on the **PCI Express mini card (mPCIe) slot**. – Cable 60cm
- ◆ **PE4C-EC060A V3.0** allows user to test PCI Express x16 Add-in-Card on the **ExpressCard slot** – Cable 60cm
- ◆ **PE4C-HP060A V3.0** allows user to test PCI Express x16 Add-in-Card on the **PCI-e slot** – Cable 60cm
- ◆ **Compliant with PCI Express 3.0 Specification:** Maximum 8Gbps
- ◆ Power Supply: ATX PSU, 12V DC Jack adapter, 8PIN connector (for D220P AC adapter), **Three select one.**

System Requirements

- Notebook PC or Desktop PC with an available **ExpressCard slot** or **PCI-s slot** or **PCI Express mini card slot**
- Windows 8 (32-/64-bit) / 7 (32-/64-bit) / Vista (32-/64-bit) SP2 or later/ XP (32-/64-bit) SP3 or later

Notice:

1. PE4C V3.0 is PCIe 1-Lane 5.0Gbps bandwidth limit passive adapter in compliance with Expresscard 2.0 specification.
2. Basically, PCIe add-on card designed for desktop. We can't guarantee it compatibility with your laptop. Depends on OS version, notebook's BIOS, device driver,
3. Almost PCIe 16x video card can't get enough memory resource are allocated. Can't work in your laptop.
4. External Power ATX Power required.
5. All of interoperability is not guaranteed.

Dimension & Weight

22cm x 9.5cm x 4cm
200g


Certification

RoHS

Operating Temperature

0 ~ 70°C

PE4C-EC060A V3.0 Package Contents

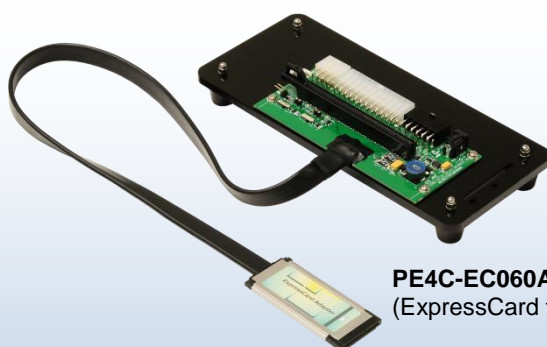

PE4C-EC060A V3.0
(ExpressCard to PCI-E Slot) x1x1



Y08-V02-032
(8pin to two 8pin) x1



G0086
(M3 Screw Nut) x2



G0023
(M3x12 Screw) x2



G0020
(M3x60+6 Pillars) x2



G0021
(M3x50+6 Pillars) x2




G0022
(M3x13+6 Pillars) x2



G0038
(M3x0.5 Washer) x4

PE4C-PM060A V3.0 Package Contents

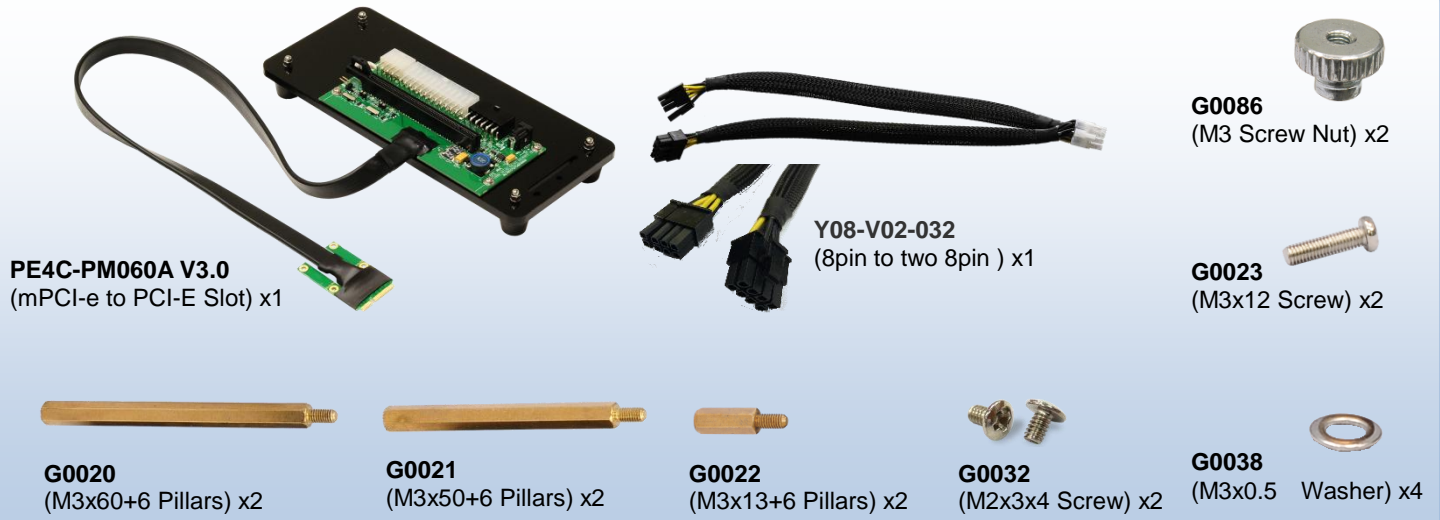

PE4C-HP060A V3.0 Package Contents

