

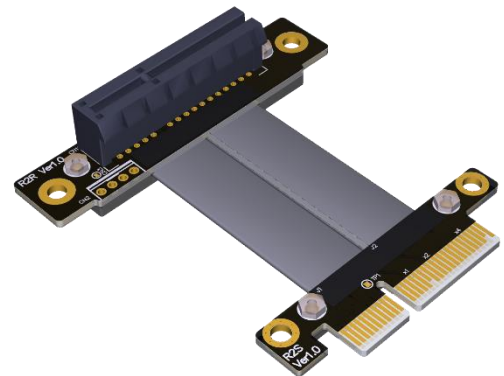
R2y series is PCIe x4 Edge Connector Extension Adapter cable, adapted to PCIe x1, x4, x16, M.2 Key M / A+E, mPCIe (mini PCIe), U.2 (SFF-8639) connectors to re-locate a PCIe card slot or bridge between slots on two different PCBs.

The ribbonized format of the axial cable provides a dense and flexible solution without signal attenuation for high speed PCIe Gen3 8Gbps Data Transaction, bidirectional 16Gbps (16GT/sec) per PCIe lane.

**Interface:** PCIe x4

**Application:** PCIe card

**Description:** 4x PCI-E Extension Cable









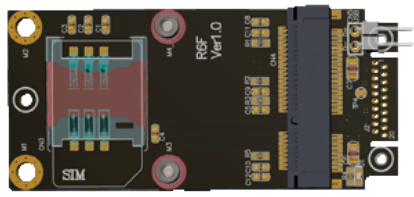

## Specification

- **Maximum Speed:**  
PCIe Gen3 8Gbps. Bidirectional 2.0GB/sec (16Gbps , 16GT/sec) per PCIe lane, PCIe Gen2 (5Gbps) & PCIe Gen1 (2.5Gbps) compatibles.
- **Header (Male) Connector:**  
PCIe x4
- **Receptacle (Female) Connector:**  
PCIe x1, x4, x16, M.2 Key M / A+E, mPCIe (mini PCIe), U.2 (SFF-8639)
- **Cable Length:**  
Standard (015) = 15cm (6inch), Customized for 1~999cm (001~999)  
\* Guideline: PCIe Gen3 8Gbps max 24 inch (60cm)
- **Cable Type:**  
Flat, Twin Axial, Thickness=1.4mm (1/16 inch) Width=9mm (3/8 inch)
- **Color:** Black
- **Connector Type:**  
Straight (SF), Right angles (SR), Left angled (SL), Dual Edge (SS)

## Bullet Points

- **Cable Quality:**  
Stable PCIe Gen3 8Gbps or higher with high quality Axial Cable
- **Cable Flexibility:**  
Highly-routable, foldable, flexible
- **Thickness=1.4mm (1/16 inch) Width=9mm (3/8 inch)**
- **Cable Length:**  
Standard (015) = 15cm (6inch), Customized for 1~999cm (001~999)
- **Contact sales for customize:**  
[sales@bplus.com.tw](mailto:sales@bplus.com.tw)
- **PCB Quality:**  
Experienced design and durable material for High frequency and low attenuation.
- **Connector Quality:**  
Taiwan Made high quality for PC server / mother board.
- **Solder Point Protection:**  
PCB-Swaddled and fixed with Bolts and nut to prevent tearing and short circuit for PCB-Cable solder points.

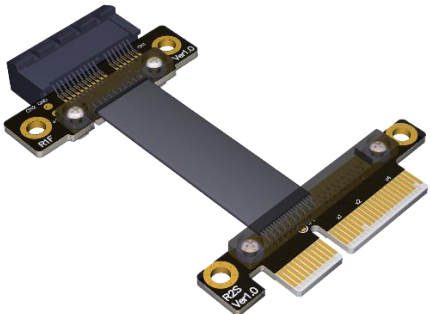
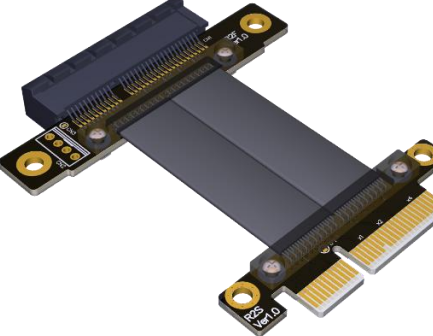


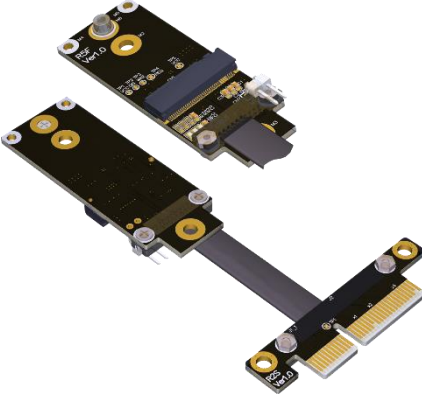
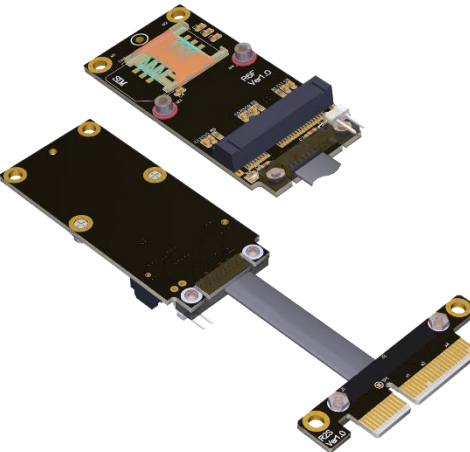
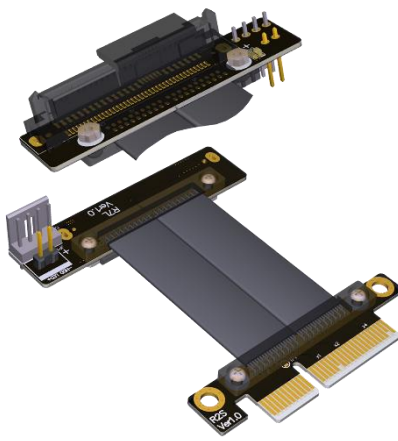
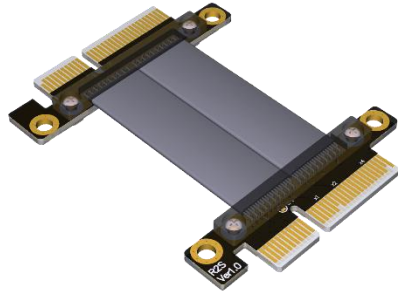
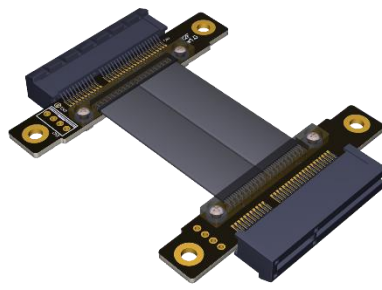
**R2y Series Comparison Table: Rxy, x=2 , Header = PCIe x4 Edge Connector**

Header (x) x Code= 2	Receptacle (y) y Code= 1~7		Description
<p>x Code= 2</p> <p><b>R2S</b></p> <p>PCIe x4 Edge Connector</p> 	<p>y Code= 1</p> <p>R1F R1R R1L</p>	 PCIe x1 Edge Free	<p><b>R21 : R21zz-<span style="color:red">nnn</span></b>            y=1: PCIe x1            * PCIe x1 connection            * Edge Free for x4, x8, x16            * zz = SF, SR, SL, SS</p>
	<p>y Code= 2</p> <p>R2F R2R R2L</p>	 PCIe x4 Edge Free	<p><b>R22 : R22zz-<span style="color:red">nnn</span></b>            y=2: PCIe x4            * Edge Free for x8, x16            * zz = SF, SR, SL, SS</p>
	<p>y Code= 3</p> <p>R3F R3R R3L</p>	 PCIe x16	<p><b>R23 : R23zz-<span style="color:red">nnn</span></b>            y=3: PCIe x16            * PCIe x4 connection            * Retention for zz=SR&amp;SL only            * zz = SF, SR, SL, SS</p>
	<p>y Code= 4</p> <p>R4F</p>	 M.2 <b>Key M</b> 2280	<p><b>R24 : R24zz-<span style="color:red">nnn</span></b>            y=4: M.2 Key M 2280            * PCIe x4 connection            * zz = SF</p>
	<p>y Code= 5</p> <p>R5F</p>	 M.2 <b>Key A E</b> 2230	<p><b>R25 : R25zz-<span style="color:red">nnn</span></b>            y=5: M.2 Key A 2230            * PCIe x1 connection            * For M.2 KeyA or A+E modules            * zz = SF</p>
	<p>y Code= 6</p> <p>R6F</p>	 mPCIe	<p><b>R26 : R26zz-<span style="color:red">nnn</span></b>            y=6: mPCIe (mini PCIe)            * PCIe x1 connection            * zz = SF</p>
	<p>y Code= 7</p> <p>R7F</p>	 U.2 (SFF-8639)	<p><b>R27 : R27zz-<span style="color:red">nnn</span></b>            y=7: U.2 (SFF-8639)            * zz = SF</p>

\* zz: Connector Type: Straight (SF), Right angles (SR), Left angled (SL), Dual Edge (SS):

\* nnn: Cable Length (cm), Standard nnn=015, 15cm (6 inch)

**R2y Series , PCIe x4 : Product List**

 <p>PCIe x1 R21SF-xxx</p>	 <p>PCIe x4 R22SF-xxx</p>	 <p>PCIe x16 R23SF-xxx</p>
 <p>M.2 Key M 2280 R24SF-xxx</p>	 <p>M.2 Key A E 2230 R25SF-xxx</p>	 <p>mPCIe (mini PCIe) R26SF-xxx</p>
 <p>U.2 (SFF-8639) R27SF-xxx</p>	 <p>PCIe x4 R22SS-xxx</p>	 <p>PCIe x4 R22FF-xxx</p>

## Customized Rxx Series Extender Board

For example:

Part-Number	R11SF020A Extender Board
R11SF020A	<p>Interface (L) PCIe 1x Code: <b>1</b></p> <p>Form-Factor (S) Gold Finger Code: <b>S</b></p> <p>Cable Length 20cm Code: <b>020</b></p> <p>Cable Material High Speed cable Code: <b>A</b></p> <p>Interface (R) PCIe 1x Code: <b>1</b></p> <p>Form-Factor (F) Flat mount Code: <b>F</b></p>

R **1** **1** **S** **F** **020** **A**

Part Number	R11SF020A	
Interface (L)	PCIe 1x	Code <b>1</b>
Interface (R)	PCIe 1x	Code <b>1</b>
Form-Factor (S)	Gold Finger	Code <b>S</b>
Form-Factor (F)	Flat mount	Code <b>F</b>
Cable Length	20cm	Code <b>020</b>
Cable Material	High Speed cable	Code <b>A</b>

PCIe-Cable Adapter part-number and product name example:

- R11SF020A PCIe 1x Extender cable=20cm
- R22SS050A PCIe 4x Jumper cable=50cm
- R33SR030A PCIe 16x Right Angle Adapter cable=30cm
- R47SF015A U.2 NVMe SSD to M.2 Key M Adapter cable=15cm

### Part-Number descriptions

Type Code	Interface (L)	Type Code	Interface (R)	Type Code	Form-Factor (S)	Type Code	Form-Factor (F)	Length (cm)	Type Code	Material
1	PCIe x1	1	PCIe x1	S	Gold Finger	S	Gold Finger	005	A	High-S cable
2	PCIe x4	2	PCIe x4	F	Flat mount	F	Flat mount	015	M	3M® cable
3	PCIe x16	3	PCIe x16	R	Right angle	R	Right angle	020	R	Ribbon cable
4	M.2 M Key	4	M.2 M Key	L	Left angle	L	Left angle	030	F	FFC cable
5	M.2 A E Key	5	M.2 A E Key					045	-XX	Other (OEM)
6	mPCIe	6	mPCIe					060	-TG	High-Tg PCB
		7	U.2 (SFF-8639)					other		

Series	Product #	Header (x) = 1~7	Receptacle (y) = 1~7
R1y	R1yzz-nnn	1: PCIe x1	1: PCIe x1 Edge Free for x4, x8, x16
R2y	R2yzz-nnn	2: PCIe x4	2: PCIe x4 Edge Free for x8, x16
R3y	R3yzz-nnn	3: PCIe x16	3: PCIe x16
R4y	R4yzz-nnn	4: M.2 Key M	4: M.2 Key M
R5y	R5yzz-nnn	5: M.2 Key A+E	5: M.2 Key A+E
R6y	R6yzz-nnn	6: mPCIe (mini PCIe)	6: mPCIe (mini PCIe)
R7y	R7yzz-nnn	7: U.2 (SFF-8639)	7: U.2 (SFF-8639)