


接点表

P1 (USB A/M)	P2 (MINI USB)	P3 (USB A/M)	COLOR
1	1	1	RED
2	2		WHITE
3	3		GREEN
4	5	4	BLACK
外壳	外壳		GND

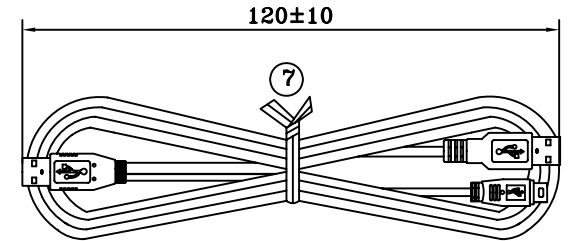

注意条件:

- A. 电气性能:
1. 导通阻抗: 3 Ohm MAX
 2. 绝缘阻抗: DC300V, 10M Ohm MIN
- B. 机械性能:
1. 插拔力测试: 插入力: 最大3.0Kgf
拔出: 最小0.7Kgf
 2. 燃烧测试: VW-1
- C. 盐雾测试:
1. 盐雾测试24H以上.



未注公差	CUSTOMER:	CUST NO:
PRODUCT NO:	PART NO:	
APPROVED BY	DRAWING SIZE	1:1 A
CHECKED BY	UNIT	mm
DRAWN BY 舒忠彪	PAGE	1 OF 1
SORTING NO.	YQ	

NO.	ITEM	DESCRIPTION	QTY
7.	扎带	黑色PE有芯扎带 L=80MM	1
6.	PVC	PVC 45P COLOR:BLACK	15g
5.	插头	USB MINI 5P前五后四三件式 (镀镍) 黑色胶芯超薄型	1SET
4.	插头	USB A公三件式短铆脚 (镀镍) 白色胶芯	1SET
3.	插头	USB A公三件式长铆脚 (镀镍) 白色胶芯	1SET
2.	线材	NO 28AWG/2C (红黑) COLOR:BLACK OD:3.0mm	160mm
1.	线材	UL 2725 28AWG(1P+2C)+AL+D+B(16/3/0.12TCCS) COLOR:BLACK OD:3.5mm	660mm