Wireless USB Mini Card Adapter ver1.1b

Model:USBMI-D

[1] Impedance control required for CLK+ CLK- PETXP PETXN PERXP PERXN : 100ohm
[2] Impedance control required for DP DN : 90ohm

History: Ver1.1a first release
History: Ver1.1b second release change J5 to DC jack 5V select

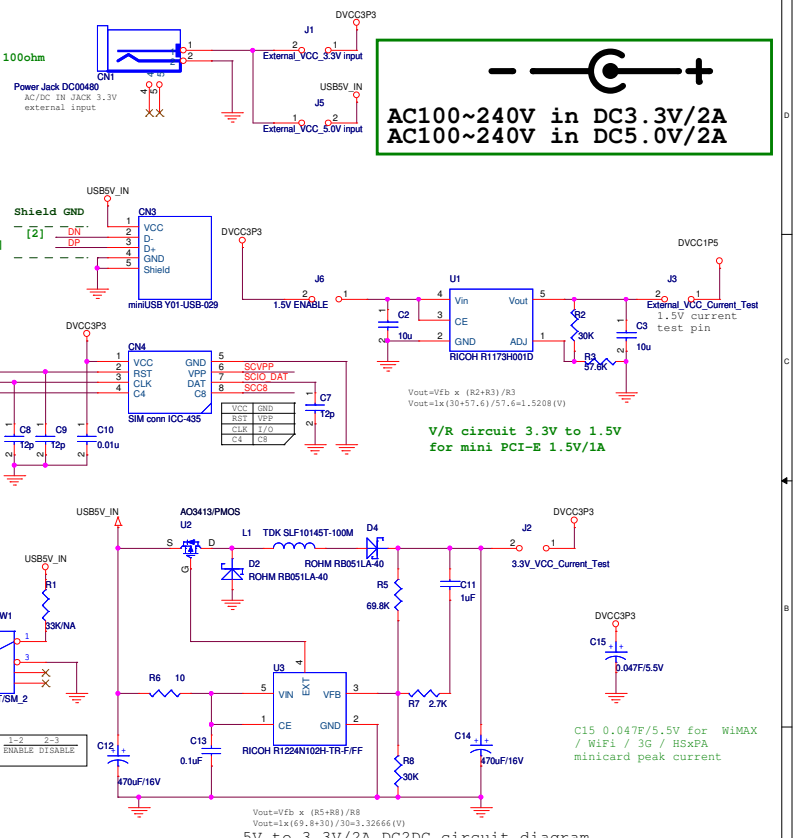

JUMP description

J1 DC 3.3V POWER input
J2 POWER from Internal DC2DC circuit connector
J3 1.5V current test pin
J4 external ACCESS LED output
J5 DC 5.0V POWER input
J6 1.5V POWER enable
J7 external POWER LED output

DC JACK POWER INPUT select	J1	J5
DC 5.0V IN	OPEN	SHORT
DC 3.3V IN (default)	SHORT	OPEN

Title	Wireless MiniCard to USB Reader	Design by:Gerry Chen	
Size B	Document Number USBMI-D.DSN	www.Bplus.com.tw	Rev 1.1b
Date: Monday, January 25, 2010	Sheet 1 of 1		